
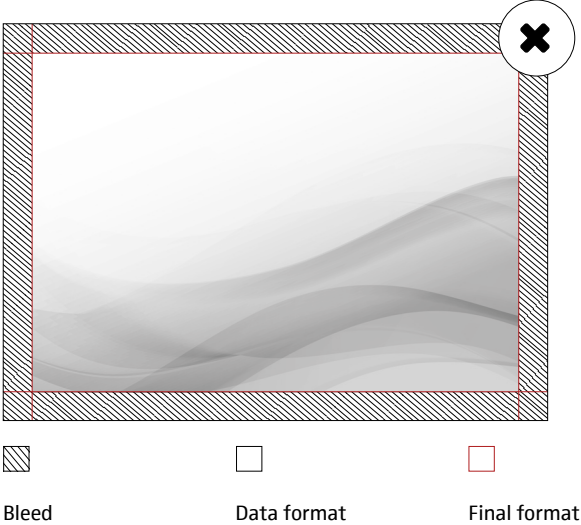


PRINT DATA

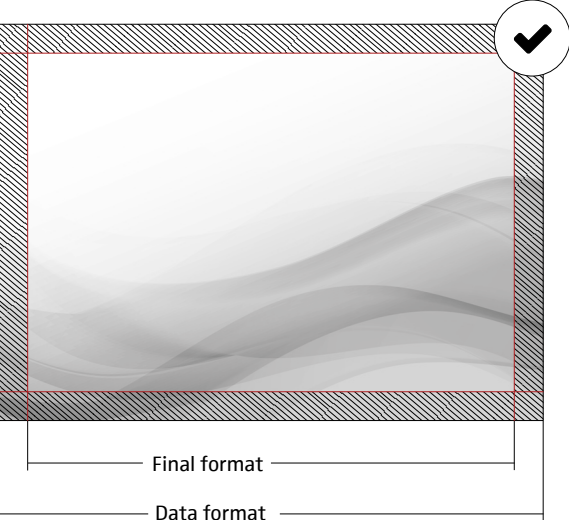

FILE FORMATS

- JPG, TIFF only suitable for image files
- PDF files
 - PDF/X-3:2002 standard
 - PDF version must be 1.3
 - all fonts must be converted to paths or be embedded
 - Do not apply crop, bleed or registration marks

COLORS

- Color mode: CMYK or greyscales, 8 Bits/Channel
- Screen colors (RGB) will be converted
- Color profile: ISO Coated v2 (ECI) available at www.eci.org
- Black: C = 87%, M = 78%, Y = 65% und K = 100%
- Grey: C = 0%, M = 0%, Y = 0% und K = 0-100%

FONTS

- at least 8 mm font height

RESOLUTION

- in a ratio of 1:1 at least 72 dpi
- in a ratio of 1:10 at least 720 dpi

BLEED

The bleed describes the area outside the cut that is sewn to the rubber lip after printing. In order to avoid white stripes it should be 20 mm per side length. The graphics of the print file must fill the entire bleed area.

END FORMAT	DATA FORMAT
1000 × 1000 mm	1040 × 1040 mm
1000 × 1500 mm	1040 × 1540 mm
850 × 2000 mm	890 × 2040 mm
1000 × 2000 mm	1040 × 2400 mm
850 × 2500 mm	890 × 2540 mm
850 × 2250 mm	890 × 2290 mm
1000 × 2250 mm	1040 × 2290 mm
2000 × 2250 mm	2040 × 2290 mm
3000 × 2250 mm	3040 × 2290 mm
1000 × 2500 mm	1040 × 2540 mm
2000 × 2000 mm	2040 × 2040 mm
3000 × 2000 mm	3040 × 2040 mm
2000 × 2500 mm	2040 × 2540 mm
3000 × 2500 mm	3040 × 2540 mm